

SolarAssistant Install Walkthrough

Parallel Sol-Ark 15K inverters + Pytes V5 battery stack

Simplified — assumes the cables and splitter are ordered from the solar-assistant.io shop

No pinouts. For the electrical detail behind any step, see the full deck or [README.md](#)

What we're building

SolarAssistant reads **every inverter individually** and **every battery pack**, from one Raspberry Pi.

Source	What you get
Each inverter	Load, PV per MPPT, battery, grid, temps, serial, parallel role
Inverter cluster	Site totals across all units
Each battery pack	Serial, firmware, SOC, cell voltages, imbalance, cycles
Battery bank	Total capacity, SOC, charge/discharge limits

This adds monitoring to an already-commissioned system. It is **not** a commissioning procedure for the inverters or the battery.

The core problem: one port, two jobs

The Sol-Ark's **2-in-1 BMS port** is a single RJ45 socket carrying two independent conversations at once:

Bus	Who uses it	What for
CAN	Inverter ↔ battery BMS	Already in use on a commissioned system
RS485	SolarAssistant	The one you are adding

Both fit in the one connector — but **only one plug fits the socket**, and the battery is already in it.

That is the entire reason the splitter exists. It is the only part of this install that is not simply "plug the cable in."


The two scaling rules

Inverters do NOT share a cable. Each Sol-Ark needs its own RS485 cable into its own USB port. The parallel CAN link between inverters carries no SolarAssistant data.

Battery packs DO share a cable. One console cable reads an entire stack — two packs or twelve. The master aggregates them.

Everything about the parts list follows from this asymmetry.

Topology

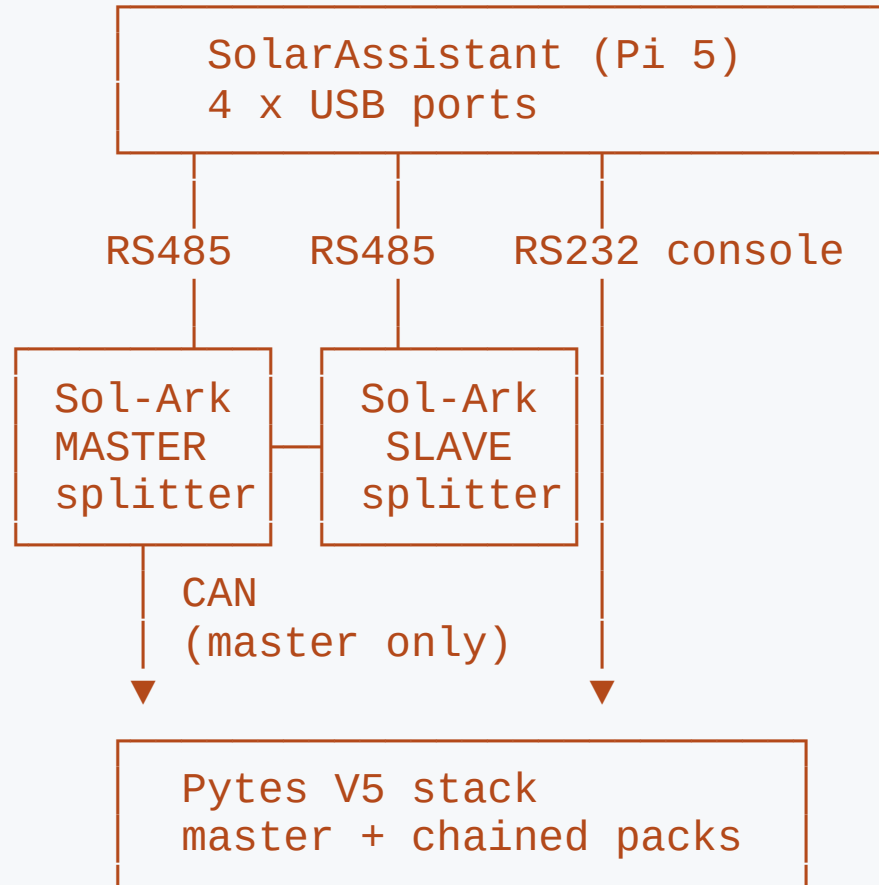

Each inverter = one RS485 leg and its own splitter. **Only the master's CAN leg reaches the battery**; slaves get battery state over the parallel link. CAN never reaches the Pi.

Ordering

What to buy, and how many

Purchase rules

Scope	Item	Qty	Unit
Per site	Device with software (Pi 5)	1	\$229
Per Sol-Ark 15K	RJ45 splitter	1 each	\$14
Per Sol-Ark 15K	Sol-Ark RS485 USB cable	1 each	\$29
Per Pytes V5 stack	Pytes console USB cable	1 each	\$29

$$\text{Total} = \$229 + (\$43 \times \text{inverters}) + (\$29 \times \text{stacks})$$

Site	Total		Site	Total
1 inverter, 1 stack	\$301		3 inverters, 1 stack	\$387
2 inverters, 1 stack	\$344		4 inverters, 1 stack	\$430

All order links: solar-assistant.io/shop

The USB port budget

More than 3 inverters on a site requires a separate powered USB hub.

USB ports required = inverters + battery stacks

The supplied Pi 5 has **four** USB ports.

Site	Ports	Fits?
2 inverters, 1 stack	3	Yes, 1 spare
3 inverters, 1 stack	4	Yes, none spare
4 inverters, 1 stack	5	No — powered hub
3 inverters, 2 stacks	5	No — powered hub

The hub must be **powered**. Bus-powered hubs cause intermittent FTDI dropouts.

Order the parts, don't source them locally

This deck assumes **every cable and the splitter come from the solar-assistant.io shop**. That assumption is doing a lot of work — it removes the entire class of problems caused by wrong-pinout cables and lookalike adapters.

The supplied cables are 1.5 m, shielded, and pre-wired for this inverter family.

Measure the RS485 run from the splitter, not from the inverter port. Need more than 1.5 m? Order a custom length rather than adding a coupler.

Nothing in this deck requires you to identify a pin, crimp a connector, or verify a conductor. If you find yourself doing any of those, you are off this path.

Wiring the inverters

Repeat once per Sol-Ark

Before you open anything

The RS485 port is behind the wiring compartment cover, alongside conductors at **battery and AC potential**.

Shut down the inverter. Open the DC and AC disconnects. Confirm de-energised before removing the cover.

Follow Sol-Ark's own shutdown sequence for your model and firmware.

A comms cable is not worth working a live 15 kW enclosure.

Four RJ45 jacks — three are wrong

Silkscreen	×	What it is
Parallel	2	Inverter-to-inverter link — leave alone
Modbus RS485	1	External meters. Not this one
Battery CANBus	1	The splitter goes here , right-hand jack

Modbus RS485 is a decoy. You are running an RS485 cable and there is a jack labelled **Modbus RS485**. It is the wrong one. The splitter goes on **Battery CANBus**.

Step 1 — Confirm the battery protocol


On each inverter's display, check:

```
Battery type      : Lithium  
Lithium protocol  : CAN (protocol 0)
```

- **CAN (protocol 0)** → the normal Sol-Ark + Pytes case. **You need the splitter.**
- **Anything RS485** → this approach does not apply. Stop and check the full guide.

Check **every** inverter, not just the master — a swapped or re-flashed unit may not match its siblings.

Step 2 — Fit the splitter

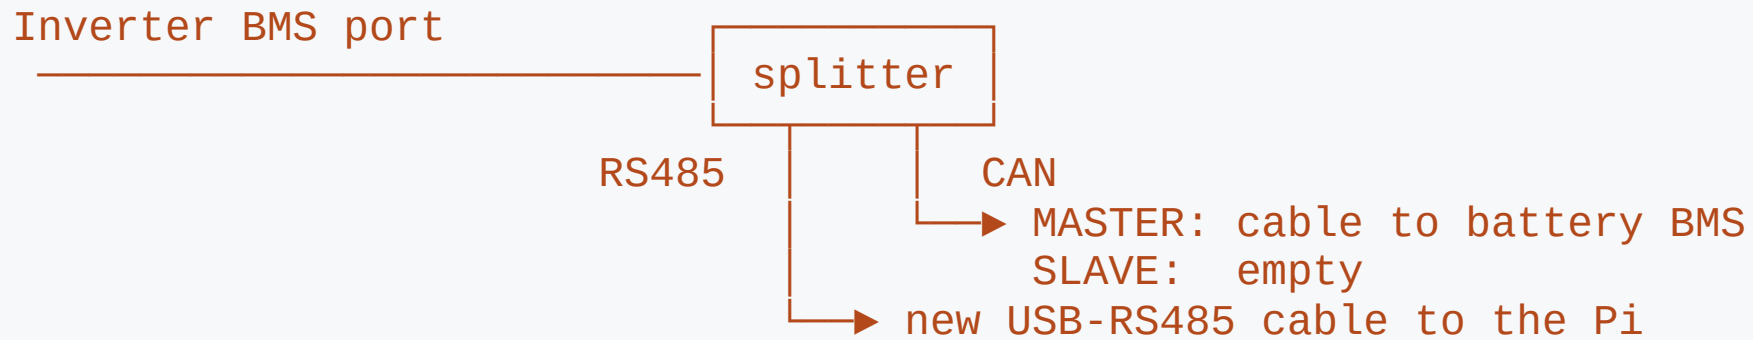

On the master: unplug the battery cable, fit the splitter, plug the battery cable into the splitter's CAN leg. **On a slave:** the jack is already empty — fit the splitter and leave the CAN leg empty. The legs are **not interchangeable**; each is labelled.

Use the shop splitter. A generic RJ45 Y-adapter looks identical and is easier to source locally, but it is wired straight through and **will break battery comms**.

Steps 3 & 4 — Cable and label

Step 3 — One cable per inverter. Plug the Sol-Ark RS485 cable into the splitter's RS485 socket, run it to the Pi, own USB port. Never bridge two inverters onto one adapter.

The inverter-to-inverter parallel CAN link is separate — **leave it alone.**

Step 4 — Label both ends by serial number, not "1" and "2":

Cable label (serial)	Parallel role	Modbus №	Pi USB port
<i>serial of inverter A</i>	Master / Slave		
<i>serial of inverter B</i>	Master / Slave		

Serial is the only key that stays stable across re-seated cables.

Step 5 — Restore power

Close up, restore AC and DC, bring the inverters up.

Confirm the parallel group still reports **exactly one master** on the inverters' own displays **before** moving to SolarAssistant.

If the parallel link was disturbed while the cover was off, you want to know now — not while debugging comms.

Wiring the battery

One cable, one port, every pack

Pytes V5 — the easy half

Plug the **Pytes console USB cable** into the master pack's **RS232C / console** port. That's it.

- One cable reads the **entire stack** — 2 packs or 12
- The master is the pack at the head of the chain, address set by DIP switches
- Read the legend on *your* pack revision — Pytes has shipped several
- On a commissioned bank, addressing is already correct: **verify, don't adjust**

Don't confuse the console port with the adjacent RS485/CAN sockets — same physical connector. Wrong socket damages nothing; the battery just reports disconnected.

Three separate battery comms paths

Path	Carries	Endpoint
Inter-pack chain	Pack-to-pack aggregation	Between the packs
CAN to inverters	SOC, charge/discharge limits	Sol-Ark BMS port (via the splitter)
RS232C console	Full per-pack telemetry	SolarAssistant USB

The console cable is **additive** — the CAN link to the inverters stays exactly where it is.

Configuration

Two drivers, N ports

Step 1 — Confirm the adapters enumerated

Configuration → System → USB devices → view detail

[Configuration](#) > System USB devices - [Cycle USB power](#)

Bus 001 Device 001: ID 1d6b:0002 Linux Foundation 2.0 root hub

Bus 001 Device 002: ID 0403:6001 Future Technology Devices International, Ltd FT232 Serial (UART) IC

Bus 002 Device 001: ID 1d6b:0003 Linux Foundation 3.0 root hub

Bus 003 Device 001: ID 1d6b:0002 Linux Foundation 2.0 root hub

Bus 003 Device 002: ID 0403:6015 Future Technology Devices International, Ltd Bridge(I2C/SPI/UART/FIFO)

Bus 003 Device 003: ID 0403:6001 Future Technology Devices International, Ltd FT232 Serial (UART) IC

Bus 004 Device 001: ID 1d6b:0003 Linux Foundation 3.0 root hub

USB ID	Part	Count
0403:6001	FT232 Serial (UART)	one per inverter
0403:6015	Bridge (I2C/SPI/UART/FIFO)	one per battery stack

Missing cable here = physical problem. Stop and fix it — no configuration will help.

Step 2 — Unlock, then set the drivers

The Devices form is **read-only while connected** — press **Disconnect** first.

On a running site, Disconnect stops data collection. Do it in a maintenance window, not while chasing a live fault.

Device	Model / Driver	Connections
Inverter	Deye, SunSynk, Sol-Ark	one entry per inverter
Battery	USB PylonTech/Pytes console	the FT231X console adapter

The step people miss

Inverter **Connections** is a multi-select list — not a single-choice dropdown.

Highlight **one entry per inverter**. Two Sol-Arks → two highlighted.

Here **USB0** and **USB2** are both selected; USB1 is the battery.

Select too few and SolarAssistant silently monitors only some inverters. The dashboard still looks plausible because it shows **totals**. Nothing warns you.

Devices

Inverter

Model

Deye, SunSynk, Sol-Ark

Connections

USB0 FT232R USB UART

USB1 FT231X USB UART

USB2 FT232R USB UART

Status

● Connected - [Settings](#)

Battery

Battery

USB PylonTech/Pytes console

Connections

USB1 FT231X USB UART

Status

● Connected

Solar PV

Location

[REDACTED]

Rated power (W)

34440

Advanced

Disconnect

Verification

"Connected" is a weak signal

Why "Connected" isn't enough


The status goes green when **any** selected port opens.

It does **not** prove:

- every inverter is being polled
- every pack is enumerating


Four checks follow. Work through all of them.

Check 1 — One column per inverter

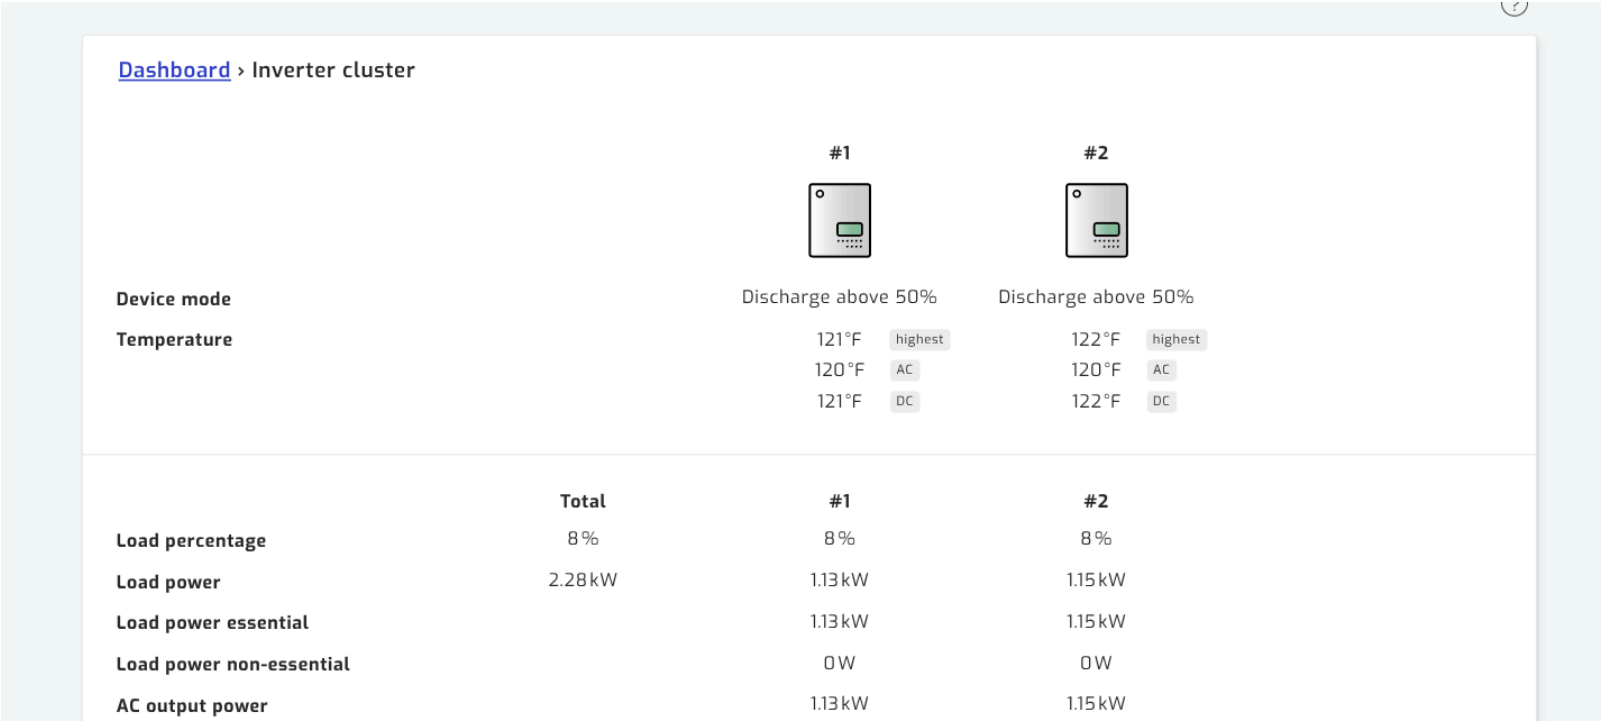

Page is titled **Inverter cluster**, with a numbered column per unit beside Total. **Count the columns against the inverters on site.**

Check 2 — Values independent and plausible

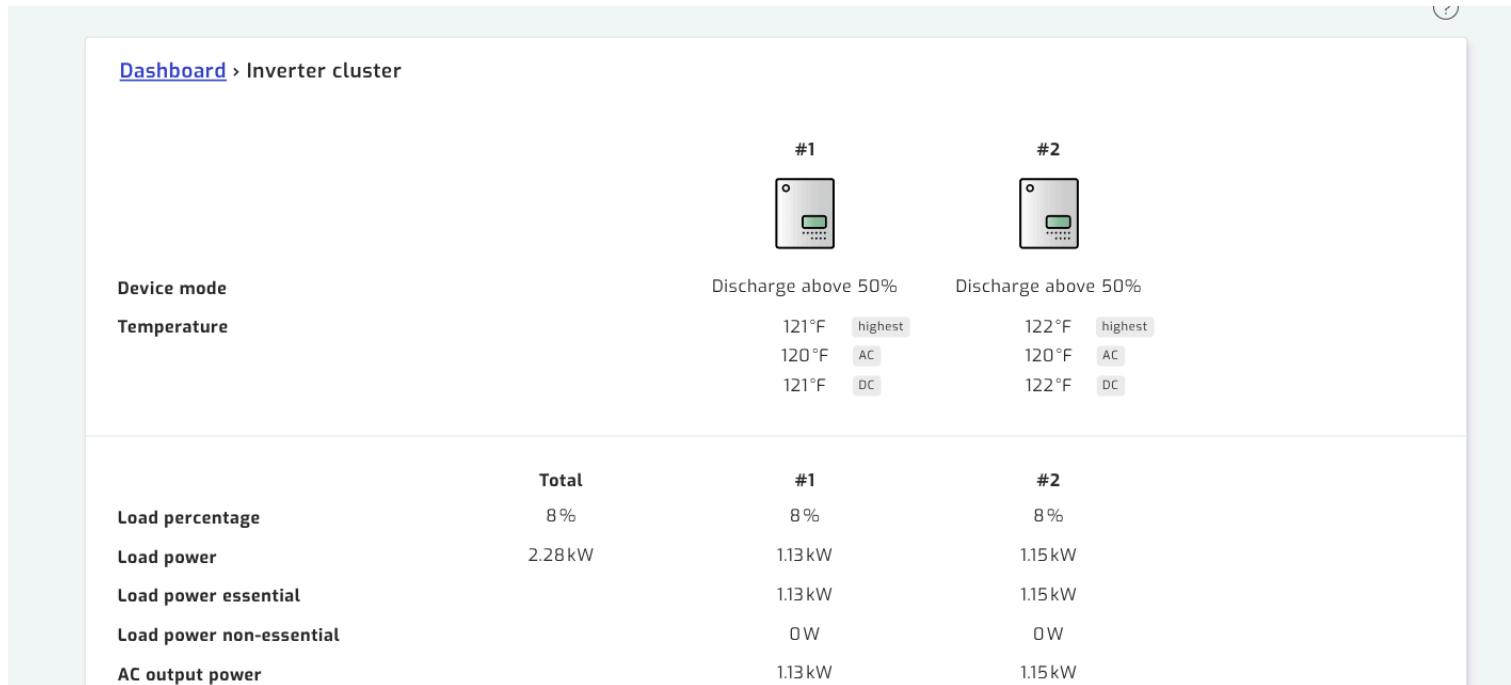

Load **1.13 vs 1.15 kW**. PV **1.19 vs 1.20 kW** — closely matched but **not identical**. That divergence is the proof of independent live reads; byte-identical columns are suspicious.

Check 3 — Serials all distinct

Serial number	[REDACTED]	[REDACTED]
---------------	------------	------------

Same serial in two columns = **one inverter read twice** — a cable is in the wrong inverter's splitter.

Each Sol-Ark 15K should also report **3 MPPTs** and **15.0 kW** max AC output.

Check 3 — Exactly one Master

Switch inverters with the breadcrumb dropdown.
Each must load its own Specification block.

Check per unit: driver, unique serial, unique
Modbus number, and `Lithium protocol: CAN`
`(protocol 0)`.

Exactly one unit must report Master. Two
masters, or none, is a parallel fault on the inverters
themselves.

Specification

Driver	Deye/SunSynk/Sol-Ark
Serial number	[REDACTED]
Protocol version	2.1
MCU version	7228
COMM version	1452
Max AC output power	15.0kW
MPPT connections	3
Parallel	Slave
Modbus number	2

The numbering gotcha

SolarAssistant numbers inverters by **USB enumeration order** — not by Modbus address, not by parallel role.

On the reference site:

SolarAssistant name	Parallel role	Modbus №
Inverter 1	Slave	2
Inverter 2	Master	1

Its "Inverter 1" is the Sol-Ark *slave*. **Match on serial number** — the only unambiguous key.

Check 4 — Every pack enumerates

Signal	Expected
Capacity	packs × per-pack Ah
Pack cards	one per pack
Protocol	reported (e.g. V2P)
Serials	all distinct
Firmware	uniform

Capacity is the fastest tell — twelve 100 Ah packs must sum to 1200 Ah.

[Dashboard](#) > Battery

Power	-104W	
Voltage	54.9V	
Current	-1.9A	
Capacity	1200Ah	
Temperature	80 °F	
State of charge	100%	
Recommended charge voltage	56.8V	
Recommended charge current	0A	
Recommended discharge	900A	
current		
Protocol version	V2P	
Cell voltage	3.437V	highest
	3.420V	lowest
Cell imbalance	0.013V	highest
	0.011V	average
	0.008V	lowest

All packs, one cable

Model name	E-BOX-48100V-D	Model name	E-BOX-48100V-D
Serial number	[REDACTED]	Serial number	[REDACTED]
Firmware	SPBMS16SRPV1.10	Firmware	SPBMS16SRPV1.1C
	.24.C16 (24-11-27)		.24.C16 (24-11-27)
Device mode	Discharging	Device mode	Discharging
State of charge	100 %	State of charge	100 %
Power	-11W	Power	-11W
Current	-0.2 A	Current	-0.2 A
Voltage	54.9 V	Voltage	54.9 V

Each pack reports its own model, serial, and firmware — all read through the **single console cable** on the master.

Firmware should be uniform across a stack.

Record a baseline

Once verified good, write these down and keep them with the install:

- Every inverter serial, parallel role, Modbus number
- Pack count, total capacity, every pack serial
- USB IDs and counts from the System page
- Typical cell imbalance range at 100% SOC

Most future comms faults show up as a **change** from baseline, not an outright failure. Without a baseline, the change is invisible.

Troubleshooting

Symptom → cause

Symptom	Likely cause
Fewer columns than inverters	Not every USB port selected
Two columns, identical serials	Both cables on the same inverter
Inverter Disconnected	Cable in the splitter's CAN leg instead of RS485
Inverter fine, battery drops out	Generic Y-adapter fitted instead of the shop splitter
Battery Disconnected	Console cable in RS485/CAN socket
Packs missing / capacity low	Duplicate addresses or broken chain
Adapter vanished from <code>lsusb</code>	Cable, port, or power — try Cycle USB power
Intermittent dropouts, no clean failure	Marginal cable run or an unpowered hub

Diagnostic order

Work outward from the host — each step rules out everything before it:

1. **USB devices page** — right count, all FTDI. Try **Cycle USB power**.
2. **Devices panel** — correct drivers, correct port count, Connected.
3. `/inverter/status` — one column per inverter, distinct serials.
4. `/battery/status` — full pack count, expected capacity.

SSH is disabled by default — there's no shell fallback. All diagnostics run from the web UI.

The failure to watch for

Someone replaces the purpose-built splitter with a **generic RJ45 Y-adapter**. They look interchangeable and the generic one is cheaper and easier to source locally.

The symptom is confusing: the inverter still reads fine, the battery intermittently drops, and nothing looks wrong at the connector.

If battery comms degrade after any maintenance visit — **check what's physically plugged into the BMS port first**. Replace it with the shop splitter rather than trying to diagnose further.

Not faults

Observation	Why it's fine
SolarAssistant "Inverter 1" is the parallel slave	Numbering follows USB enumeration order
Grid reads 0 W, 0 Hz, ~0 V	Normal on an off-grid site — the grid input is simply absent
Small differences between inverters	Desirable — proof of independent reads

On an off-grid installation, grid-absent is the **expected steady state**, not an alarm. Don't treat it as a fault, and don't let it mask a real comms problem elsewhere.

After the install

Three optional improvements

None of these is required — the install is complete without them

What, where, and what it costs

Change	Page	Disconnect?
MQTT + Home Assistant	Configuration → MQTT	No
Battery capacity fallback	Configuration → Advanced	Yes
PV forecast inputs	Configuration → Advanced	Yes

The Advanced page is **read-only while connected** and greys out every field. Disconnecting stops data collection.

Batch the two Advanced changes into one maintenance window — same page, one collection gap instead of two. Verify the install first; re-verify after.

1. MQTT + Home Assistant discovery

The biggest gain if you run Home Assistant. The broker ships **disabled**; auto-discovery publishes every metric — per inverter, per pack — as HA entities automatically.

Field	Set to
Topic prefix	leave at default
Allow setting changes	Disabled
HomeAssistant → Unique ID	short, stable site slug
HomeAssistant → Auto discovery	Enabled
Username / Password	set both

Then **Configuration** → **MQTT Broker** → **Start**. The MQTT page configures the broker; it does not start it.

MQTT — two things to get right

Allow setting changes grants write control over your inverters. Enabled, anything that can publish can change work mode, charge currents, generator control. Leave it Disabled unless you intend to automate — and never expose the broker beyond the LAN.

Unique ID is effectively permanent. Changing it later re-creates every entity under new IDs, orphaning HA history and dashboards. Set it before first connection, even on a single site.

Port 1883 is plaintext, no TLS. **Check first:** SolarAssistant runs its *own* broker — if HA already uses Mosquitto, confirm your HA version supports more than one.

2. Battery capacity fallback

Configuration → Advanced → Battery → Capacity kWh

Commonly holds a **single-pack** figure — wrong by the pack count in a multi-pack bank.

$$\begin{aligned}\text{Capacity kWh} &= \text{packs} \times \text{per-pack kWh} \\ \text{per-pack kWh} &= \text{nominal pack voltage} \times \text{pack Ah} \div 1000\end{aligned}$$

Only used when capacity **isn't readable** from battery or inverter — so it's dormant on a healthy install, and goes live exactly when comms drop. A full bank can then read as nearly empty, while you're already troubleshooting.

Risk: none. Display fallback only — charge control comes from the inverter settings and the BMS over CAN.

3. PV forecast inputs

Configuration → Advanced → Solar PV — decoration on a grid-tied site, **operational off-grid**: it's the input to "run the generator tonight?"

Field	Source
Latitude / Longitude	Site coordinates
Tilt	Racking angle, or roof pitch
Azimuth	Array bearing
Temp. coefficient, NMOT	Module datasheet
Rated power (<i>Configuration page</i>)	DC nameplate sum of panels

Azimuth **0** = **due south**, **-90** east, **90** west, **180** / **-180** north. A stored **0** is legitimate, not a placeholder.

Don't reuse a compass bearing. pvlib, PVWatts and Home Assistant put **0** at **north**. Applying one here points a south-facing array due north.

PV forecast — validate, don't guess

Compare predicted vs actual over two or three clear-sky days:

Symptom	Likely culprit
Over/under-predicts by a fixed ratio	Rated power
Peak arrives earlier or later	Azimuth
Accurate in one season, poor in the other	Tilt
Drifts high in afternoon heat	Temperature coefficient

Multi-orientation arrays: only one tilt and one azimuth are accepted. Enter the **average** facing direction, weighted by rated power if the split is uneven, and accept an imperfect curve.

Leave these alone

Look adjustable; already correct on a working install.

Setting	Correct	Why
Battery → Read current from	Battery	Inverter is for banks where only the master is readable
Inverter → MPPT connections	Auto detect	Correctly finds the actual count
Grid connection / multiplier	Auto detect	
Allow passive reading	Yes	Harmless on a dedicated RS485 line
Grid → Provider	Default	Tariff data — irrelevant off-grid

Sol-Ark ↔ SolarAssistant

You will have **both apps open** while commissioning. The labels rarely match:

MySolArk	SolarAssistant
Limited power to Load	Zero export to load
Grid Start %	Start grid charge capacity
Grid Start A	Max grid charge current
Batt Shutdown / Low / Restart %	Output shutdown / Stop / Start discharge
BMS Lithium Batt Mode	Lithium protocol —  is CAN
SmartLoad Setup	Auxiliary → Aux port
Equipment mode / Modbus SN	Parallel role / Modbus №

Full table: **page 09**. Labels drift between app versions; the registers don't.

Terminology — where it bites

Generator on the grid input? `Grid Start %` and `Grid Start A` are the real trigger and current limit. The generator settings are **inert** — throttling a generator with a *gen* charge-current limit does nothing.

There is no `Grid Stop %` — charging ends on current taper (~5% of rated capacity, ≈95% SOC), not an SOC setpoint. An alert waiting for 100% on generator power never fires.

Time Of Use vs Use timer — these can disagree. MySolArk is authoritative for its own hardware; believe it over SolarAssistant's checkbox.

Reference

Order pages

Device (per site) — `solar-assistant.io/shop/products/device_rpi5`

RJ45 splitter (per inverter) — `.../products/deye_rj45_split`

Sol-Ark RS485 cable (per inverter) — `.../products/sunsynk_rs485`

Pytes console cable (per stack) — `.../products/pytes_rs232`

Full written guide: `README.md` — pages 00 through 09

Pinouts and cable-selection detail: the full deck, `slides.pdf`